XS-F1721

Special Application Speaker

- 140 W Max Input Power
- 7″ 2-way Speaker
- $1^{3}/_{16}$″ Balanced Drive Tweeter
- Lo Profile 1″ Depth
- Custom-fit for US and Import Vehicles
- High Efficiency (90 dB/W/m)

Specifications

Speaker	Coaxial 2-way
	Woofer: 16.5 cm ($6^{1}/_{2}$ in.), Polypropylene cone type; Tweeter: 3 cm ($1^{3}/_{16}$ in.), PEI balanced dome type
Maximum Input Power	140 watts
Rated Input Power	35 watts
Impedance	4 ohms
Sensitivity	90 dB/W/m
Frequency Response	35-30,000 Hz
Weight (per speaker)	Approx. 665 g (1 lb. 7 oz.)

Dimensions

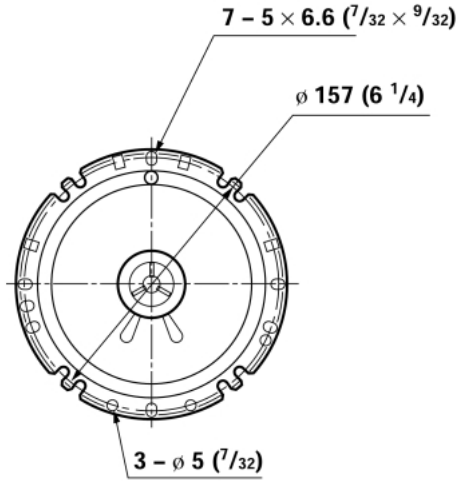

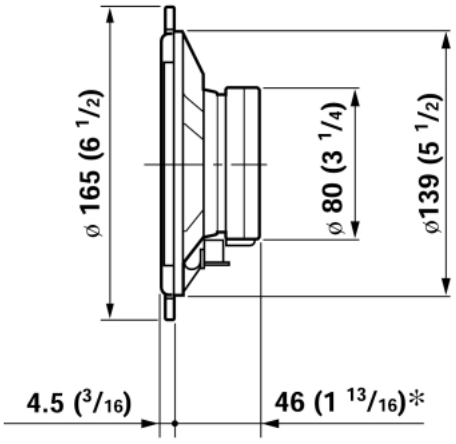

Design and specifications subject to change without notice.